(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
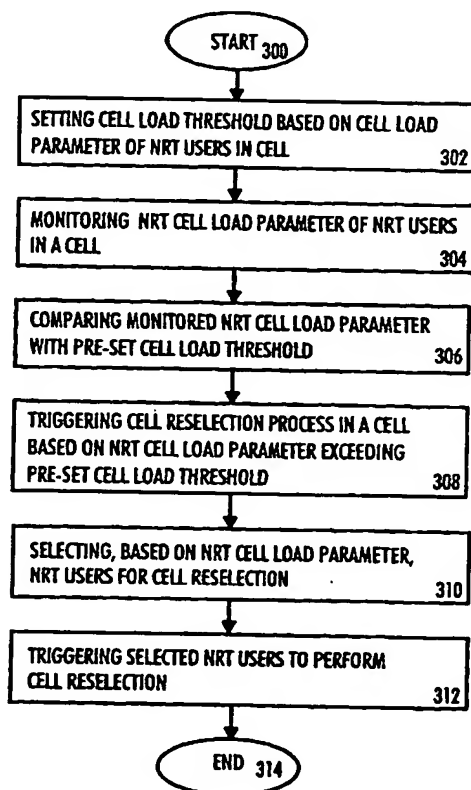**21 May 2004 (21.05.2004)**

PCT

5 3 4 1 3 1

(10) International Publication Number
WO 2004/043104 A1

(51) **International Patent Classification**[7]: H04Q 7/38

(21) **International Application Number:**
PCT/FI2002/000877

(22) **International Filing Date:**
8 November 2002 (08.11.2002)

(25) **Filing Language:** English

(26) **Publication Language:** English

(71) **Applicant** *(for all designated States except US)*: NOKIA CORPORATION [FI/FI]; Keilalahdentie 4, FIN-02150 Espoo (FI).

(72) **Inventor; and**
(75) **Inventor/Applicant** *(for US only)*: TÖLLI, Antti [FI/ES]; C/ Rogelio Oliva, no 7, 3A, E-29004 Guadalmar Málaga (ES).

(74) **Agent:** KOLSTER OY AB; Iso Roobertinkatu 23, P.O. Box 148, FIN-00121 Helsinki (FI).

(81) **Designated States** *(national)*: AE, AG, AL, AM, AT (utility model), AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ (utility model), CZ, DE (utility model), DE, DK (utility model), DK, DM, DZ, EC, EE (utility model), EE, ES, FI (utility model), FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SI, SK (utility model), SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) **Designated States** *(regional)*: ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: A METHOD AND A SYSTEM FOR SELECTING NON-REAL-TIME USERS TO PERFORM CELL RESELECTION

(57) **Abstract:** The invention relates to a method for traffic management in a radio system, and a radio system. The method comprises: monitoring (502) at least one cell load parameter of non-real-time users in a radio cell; triggering (504) a cell reselection process in the radio cell on the basis of a cell load parameter exceeding a pre-set cell load threshold; selecting (506), based on at least one cell load parameter, the non-real-time users to perform cell reselection; triggering (508) the selected non-real-time users to perform cell reselection.

WO 2004/043104 A1